


# AQ-205 Agristand

## Micro Sprinklers

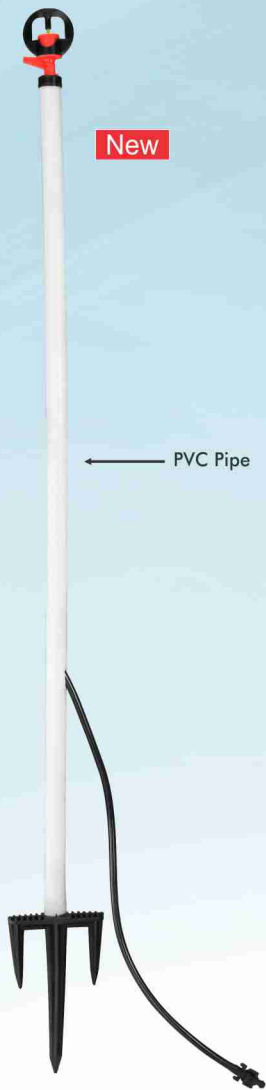

New

PVC Pipe



Quick Thread Type

Push Fit Type



3/8" Thread Nozzle

1/2" Thread Nozzle



6 X 8 mm Adopter

5.5 x 7.5 mm PE

6 mm Plated Steel Rod

### Connection: Pushfit / 3/8" Male Threaded

Swivel Color	Nozzle Color	Nozzle (mm)	1.5 kg/cm <sup>2</sup>		2.0 kg/cm <sup>2</sup>		2.5 kg/cm <sup>2</sup>	
			Flow lph	Dia. m	Flow lph	Dia. m	Flow lph	Dia. m
Blue	Grey	1.14	62	7.6	71	8.2	80	8.5
	Green	1.4	90	8.4	102	8.7	118	9.0
Green	Orange	1.5	105	8.7	122	9.2	136	9.6
	Black	1.78	140	9.2	162	9.5	180	10.0
	Blue	1.98	174	9.8	202	10.2	225	10.4
	Yellow	2.2	210	10.2	245	10.6	295	11.0
	Red	2.4	245	10.5	290	11.0	350	11.4

\* Tested at 1m height above ground

### Applications

- Overhead irrigation for extra range spacing up to 6 m.
- Innovative insect proof structure.
- Stable irrigation stand with minimum pressure loss.
- Recommended Pressure : 1.5 - 3 Bar
- Flow Rate: 60-350 l/h

### Connection: 1/2" Male Threaded

Swivel Color	Nozzle Color	Nozzle (mm)	1.5 kg/cm <sup>2</sup>		2.0 kg/cm <sup>2</sup>		2.5 kg/cm <sup>2</sup>	
			Flow lph	Dia. m	Flow lph	Dia. m	Flow lph	Dia. m
Green	Orange	1.5	105	9.1	122	9.6	136	10.2
	Blue	1.98	174	10.6	202	11.0	225	11.5
	White	2.8	350	12.0	402	12.5	449	12.8

\* Tested at 1m height above ground



E-mail: [contactus@automatworld.com](mailto:contactus@automatworld.com)  
Website: [www.automatworld.com](http://www.automatworld.com)

Creating a Green World